
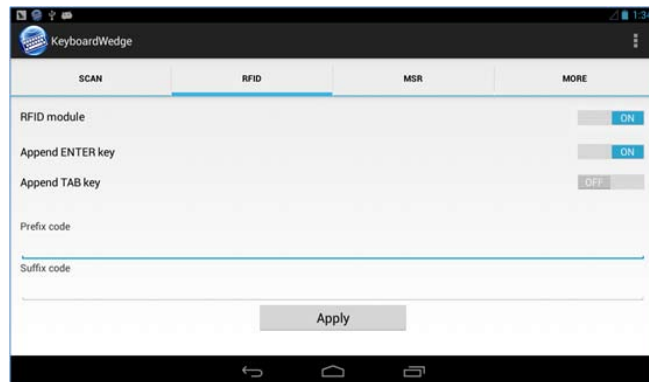


MSR/ RFID Reader Module

Enable and disable MSR/ RFID Reader module, and set up the parse data format:

1. Launch Keyboard Wedge App and click the MSR or RFID tab
2. Turn on the MSR or RFID module
3. Key in Prefix and Suffix codes to adjust the parse data format
4. Click Apply

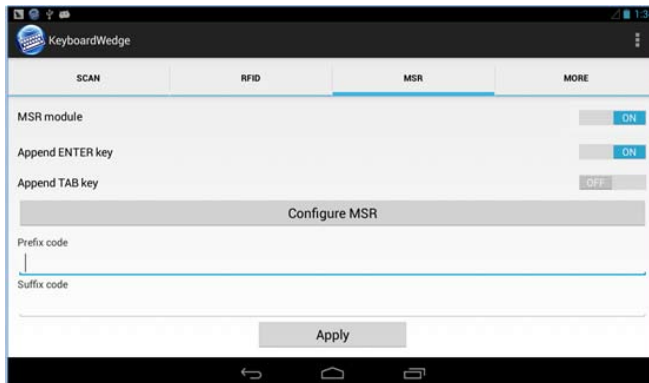

NOTE: Unless you are sure you need to change the parse data format, we recommend you do not use this setting.

DT307SQ

BASIC OPERATION GUIDE

ENGLISH



INTRODUCTION

Thank you for acquiring the DT307SQ Mobile Tablet. The DT307SQ offers a 7" capacitive touch display in a compact, rugged, and lightweight package. The DT307SQ enables efficient point-of-service/sales applications, inventory management, and field services.

The DT307SQ provides the precise features needed to streamline operations and improve productivity, data accuracy, and service.

PACKAGE CONTENTS

- One DT307SQ
- One Battery Pack and Handstrap
- AC-DC Power Adapter
- Basic Operation Guide

*The actual package contents may vary depending on the configuration acquired.

PRECAUTIONS


- Always exercise care when operating and handling the DT307SQ.
- Do not disassemble any portion of the DT307SQ, as this will void any product warranty.
- Do not use any power adapter or charging cradle other than the one provided with the tablet or acquired from the manufacturer or its partners.
- In the unlikely event that abnormal noise, strange odor, or smoke is present, immediately power down the DT307SQ and disconnect all power sources. Please report the problem to your device provider immediately.

DT307SQ I/O Ports


DT307SQ Front View



DT307SQ Rear View

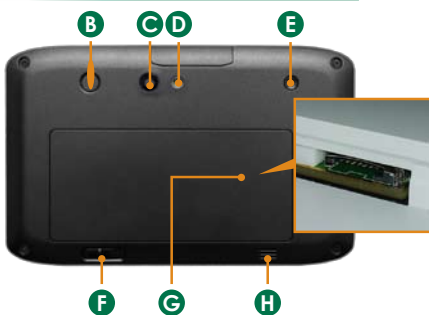

DT307SQ Side View



- A** Magnetic stripe reader (Optional)
- B** Trigger button
- C** Camera (Optional)
- D** LED Flash (Optional)
- E** Power button
- F** Battery switch
- G** Micro-SD card reader
- H** Speaker
- I** mini USB port
- J** Headphone-out
- K** USB 2.0 port
- L** DC-in

DT307SQ LED Status Indicators

1. Power Mode Status Indicator:

- Blue: Device is powered on
- Blinking Blue: Main battery charging
- Orange: Low battery mode
- Blinking Orange: Extremely low battery mode
- Off: Device is powered off or in suspend mode

2. Wi-Fi Status Indicator:

- Blue: Connected to a wireless AP
- Blinking blue: Connecting to a wireless AP
- Off: Wi-Fi is disabled



Data Capture Module Operation Guide

If your DT307SQ comes with a Barcode Scanner, RFID Reader and/or MSR module(s), you may refer to the steps below to configure the settings.

BASIC MODULE OPERATION

3 steps to capture the data results from Keyboard Wedge:

1. Turn on module from the **Keyboard Wedge App**
2. Launch a note-related App
3. Capture the data and verify the results

BARCODE SCANNER

Launch the scanner module, and adjust the parse data format :

1. Tap the **Keyboard Wedge App**, select **SCAN** tab, and turn on the Scanner module
2. Key in Prefix and Suffix codes to adjust the parse data format
3. Click **Apply**



NOTE: To ensure the system performance, turn on only the symbologies you are going to use.

Add/ remove barcode symbologies

1. Tap **Barcode Scanner App**
2. Turn on/off each barcode symbologies under **SYMBOLGY** tab

