




373T/MD RUGGED MEDICAL TABLET

Slim, Antimicrobial, ANSI/AAMI ES60601-1 Certified Tablet for Efficient Operations

The 373T/MD Rugged Medical Tablet features the integration of a brilliant 17" capacitive touch screen and a high performance, energy-efficient Intel® 11th Generation processor within a slim, durable package. With built-in front and back cameras, Wi-Fi as well as optional data capture modules, this medical tablet offers health professionals an effective tool to monitor, record and retrieve patient information. With its large, vivid display, the 373T/MD Rugged Medical Tablet shows a wide work area and detailed application interface to enhance user experience and workflow.

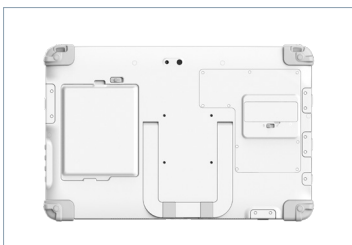

Features

- 17" Full-HD capacitive touch screen, digital pen support
- Intel® 11th Generation Pentium® Gold or Core™ i processor
- Microsoft® Windows® 10 IoT Enterprise or Ubuntu operating system
- NIST compliant BIOS available
- ANSI/AAMI ES60601-1 certified with antimicrobial enclosure
- IP65-rated front panel
- Hot swappable battery pack
- Built-in front and back cameras

Major Options

- 4K resolution screen
- Smart card/CAC reader
- 4G LTE/AWS

Specifications



Model	373T/MD
System	
CPU	Intel® Pentium® Gold 7505, Dual-Core, 3.5GHz (max turbo frequency) Intel® Core™ i5-1135G7, Quad-Core, 4.2GHz (max turbo frequency) Intel® Core™ i7-1165G7, Quad-Core, 4.7GHz (max turbo frequency)
RAM	8GB to 16GB
Storage	256GB to 1TB Flash
Operating System	Microsoft® Windows® 10 IoT Enterprise or Ubuntu
NIST Compliance	NIST compliant BIOS available
Display	17" capacitive touch screen
Display Resolution	1920 x 1080, or 3840 x 2160 (optional)
Control Switch and Buttons	1 power button, 3 programmable buttons
Microphone	Built-in microphone
Speaker	Built-in speaker
Camera	Full-HD front camera and 8 megapixel back camera
Network Interface	
WLAN	Wi-Fi 802.11ax, 2.4GHz/ 5GHz dual band
I/O Ports	
USB Ports	USB 3.0 x 6, USB Type C x 1
Headset Jack	1 (3.5mm)
Ethernet Port	1
DC-in	1
Mechanical and Environmental	
AC/DC Adapter	Input: 100-240V AC; Output: 18.5V DC, 3.89A
Battery Pack	Hot swappable battery, 11.4V, 5400mAh
Enclosure	ABS + PC plastics and magnesium-aluminum alloy; antimicrobial enclosure
Dimensions (H x W x D)	16.9 x 11.1 x 1.06 in/ 430 X 282 X 27mm
Weight	4.41 lbs/ 2 kg
VESA-Compliant Mounting	75mm x 75mm VESA standard
Durability	IP65-rated front panel
Regulatory	FCC/IC, CE/CB, RCM, CCC, ANSI/AAMI ES60601-1
Temperature	Operation: -10°C to 60°C (-14°F to 140°F), optional -30°C to 60°C (-22°F to 140°F) Storage: -55°C to 70°C (-67°F to 158°F)
Humidity	0% – 90% non-condensing
Major Options	
Smart Card/CAC Reader	Full-slot, reads ISO 7816 T=0, T=1; 1.8/3/5V smart card
Mobile Broadband	4G LTE/AWS

* Specifications subject to change without notice.

Accessories

The 373T/MD Tablet has customized accessories to meet numerous deployment needs.

Digital Pen

Pen Tip	Diameter: 0.059 in/ 1.5mm, replaceable
Buttons	2 side buttons (right-click and eraser)
Battery	1 AAAA, replaceable
Color	Black
Dimensions	Length: 5.5 in/ 140 mm (including pen tip) Diameter: 0.38 in/ 9.7 mm
Weight	0.055 lbs/ 25 g



Desktop Charging Cradle

Docking support with ports for Power, USB, HDMI output and Ethernet



Wall/ Vehicle Mount Cradle

Secure Tablet mounting and charging with power, Ethernet pass-through, HDMI-out, COM, and USB ports



Battery Charging Kits



Battery Pack



3-Slot Battery Holster

